


无刷直流行星齿轮减速电机(内齿圈材质: 金属)
BLDC Planetary Gear Motor (Ring Gear Material: Metal)

42JXGT200K/42ZWNP59 $\Phi 42$ 行星减速器, 允许转矩范围: 2N.m~20N.m
42mm OD Planetary Gearbox,
Permissible Load Range: 2N.m~20N.m

无刷直流电动机, 3相10极, 内置驱动器 3 phase 10 poles brushless DC motor , with built-in driver



外形和安装尺寸 Dimensions

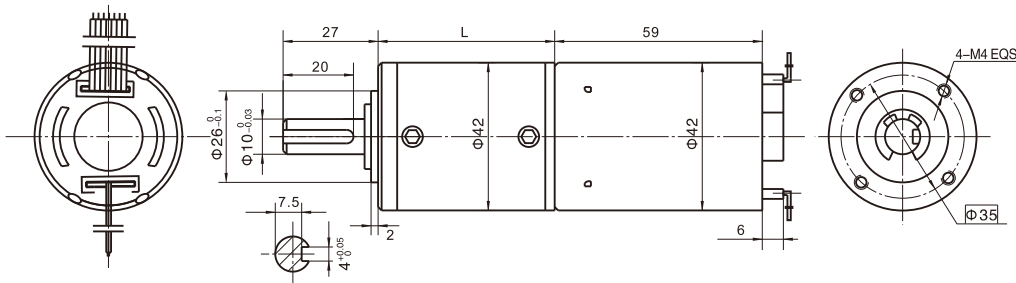

无刷电动机主要技术参数 Brushless Motor Technical Data

电机型号 TYPE	极 数 Number of poles	相 数 Number of phase	额定电压 Rated voltage VDC	空载转速 No-load speed r/min	额定转速 Rated speed r/min	额定转矩 Rated torque mN.m	额定电流 Rated current A	输出功率 Output power W
42ZWNP59-2440	10	3	24	4000	3000	68	1.2	21

无刷行星齿轮减速电机主要技术参数 Brushless Gear Motor Technical Data

配置42ZWNP59-2440无刷直流电机 (42ZWNP59-2440 BLDC Motor)

减 速 比	Reduction ratio	4.44	17	22	65	83	106	247	316	403	515
减速级数	Number of gear trains	1	2	2	3	3	3	4	4	4	4
减速器长度(L)	Length(L)	mm	37.5	48.0	48.0	58.3	58.3	58.3	68.6	68.6	68.6
空载转速	No-load speed	r/min	901	235	182	62	48	38	16	13	10
额定转速	Rated speed	r/min	676	176	136	46	36	28	12	9	7
额定转矩	Rated torque	N.m	0.27	0.94	1.2	3.2	4.1	5.3	11	14	18
最大瞬间允许负载 Max. permissible load in a short time	N.m	6	25	25	50	50	50	60	60	60	60

接线方式 Wire Diagram

正极+ Phase V	负极- Phase W	转向 Reversing	调速 Speed Control	制动 Braking	+5V输出 Output	脉冲输出 Pulse Output
红 Red	黑 Black	棕 Brown	橙 Orange	白 White	绿 Green	蓝 Blue

棕色与黑色导通为CCW, 断开为CW。
白色与黑色导通为停止。
橙色为调速功能。
绿色与棕色导通全速工作。
蓝色线为脉冲输出, 电机每转一周为5个脉冲输出。

Brown wire connects with black wire for CCW and disconnects for CW.
White wire connects with black wire for stopping.
Orange wire is for speed control.
Green wire connects with brown wire for full-speed working.
Blue wire is for pulse output, motor outputs 5 pulses per revolution.